


## BALTI 150 26W 3000K CRI85

**Code: 118303**

Balti 150 is an outdoor wall-mounted luminaire designed to be equipped with COB LEDs of the last generation, with passive heat dissipation. The fittings have a very compact and shallow profile: this is ideal for applications in domestic and residential areas such as passageways, terraces and façades. They have been designed with a specific beam to ensure wide lighting of the wall or of the ceiling and of the floor, with high luminous quality. Cable gland in nickel-brass, high protection rating IP66. Thanks to their versatility and elegance, Balti 150 can be installed in indoor applications, too.

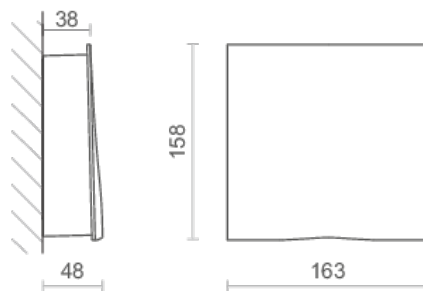

### General specifications

Designer	Ivela Design Team
Installation environment	Exterior
Native mounting type	Surface mounted
Ideal application locations	Residential, Commercial space, Gardens
Made in	Italy

### Physical specifications

Shape	Rectangular
Body material	Aluminum
Body color	Gray
Frontal material	Aluminum
Frontal color	Gray
Walkover	No
Thermal dissipation	Passive
IP	IP66
Waterstop	No
IK	IK08
Salt mist resistance	No

**Lighting specifications**

Lumen	2551
Lumen #2#	
Nominal Lumen	3400
Nominal Lumen #2#	
Source lumen	
Source lumen #2	
Power	26
W source	
W source 2	
Lm / w	
Light type	White
CCT	3000K
CRI	85
Life time	L80B10
LB value @ h	50000

**Optical specifications**

Beam	110
Orientability	Fixed

**Electrical specifications**

Power supply availability	Included
Power supply position	Internal
Dimmable	No
Dimming type	ON/OFF
Power supply type	Voltage
Input Voltage (V)	230
Frequency (Hz)	50-60
Nominal current (mA)	
Insulation class	I
Cable 1 pole number	
Cable 2 pole number	
Light source type	LED COB
Power factor (cosφ)	

**Dimensions and weight**

Length (mm)	48
Width (mm)	163
Height / Thickness (mm)	158

**General conditions**

---

Warranty

**5 years**

---