



CASSIOPEA

SOSPENSIONE / SUSPENSION

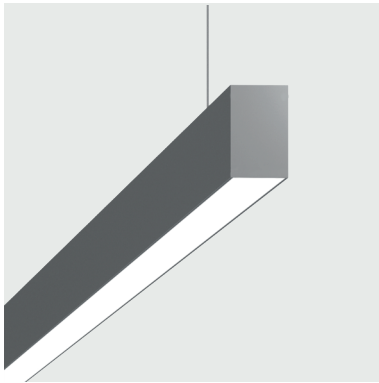

01 Bianco White 02 Nero Black 07 Oro Gold

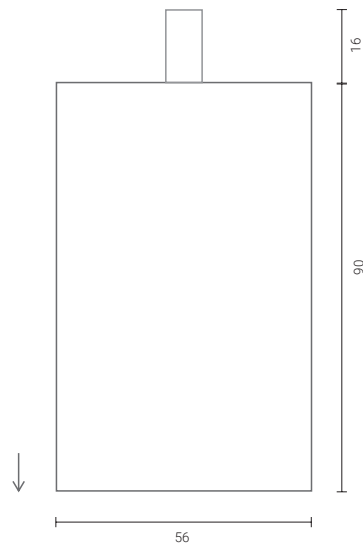

-L10
1 m
3,00 Kg

-L20
2 m
6,00 Kg

-L30
3 m
9,00 Kg

Codice base Base code	Ottica Optic	Fissaggio Fixing	Colour T (K)	Finitura Finish	Dimming Dimming	Chiusura Closing
--------------------------	-----------------	---------------------	-----------------	--------------------	--------------------	---------------------

Alimentatore e centralina interne al profilo. Customizzabile fino a 4m
Driver and control unit inside the profile. Customizable up to 4m

CA2 -	O opale / opal	SP	Z 2700K	01	IO On/Off	L10	
	P prismaticata / prismatic		C 3000K	02		DP Dali	L20
			N 4000K	07			L30

200~240 Vac

CE IP20

Caratteristiche illuminotecniche / Lighting specifications

Dimensione Size (mm)	LED Lumen	Product Lumen		Watt	Vac	Colour T	CRI
		opal	prismatic				
1004	1900	1330	1520	16	200~240	2700	93
	2000	1400	1600	16	200~240	3000	93
	2100	1470	1680	16	200~240	4000	93
2004	3800	2660	3040	32	200~240	2700	93
	4000	2800	3200	32	200~240	3000	93
	4200	2940	3360	32	200~240	4000	93
3004	5700	3990	4560	48	200~240	2700	93
	6000	4200	4800	48	200~240	3000	93
	6300	4410	5040	48	200~240	4000	93

Reference configurator


Il codice prodotto si compone mettendo in fila, da sinistra a destra, i dati contenuti nelle colonne a partire da "Codice base".

The product code is created by putting in sequence the data starting from "Base code", from left to right.

es: CA2-OSPC01DPL20



Accessori / accessories

 **Rosone copricavi** / Cable cover canopy
AC00262 Bianco / White
AC00320 Nero / Black
 Ø83 mm