



# LYRA S

## ANGOLARE / ANGULAR

[Angolare](#) [Corner](#)

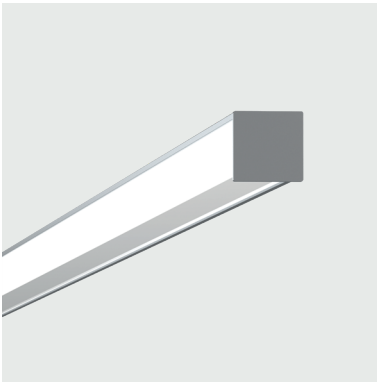

01 Bianco White 02 Nero Black 07 Oro Gold



**-L10**  
1 m  
0,30 Kg

**-L20**  
2 m  
0,60 Kg

Codice base Base code	Ottica Optic	Fissaggio Fixing	Colour T (K)	Finitura Finish	Chiusura Closing
--------------------------	-----------------	---------------------	-----------------	--------------------	---------------------

Customizzabile fino a 2m  
Customizable up to 2m

<b>LS2 -</b>	<b>O</b> opale / opal	<b>PL</b>	<b>Z</b> 2700K	<b>01</b>	<b>L10</b>
			<b>C</b> 3000K	<b>02</b>	<b>L20</b>
			<b>N</b> 4000K	<b>07</b>	

24Vdc

CE IP20

### Caratteristiche illuminotecniche / Lighting specifications

Dimensione Size (mm)	LED Lumen	Product Lumen		Watt	Vdc	Colour T	CRI
		opal	prismatic				
1003	1900	1235	-	16	24	2700	93
	2000	1300	-	16	24	3000	93
	2100	1365	-	16	24	4000	93
2003	3800	2470	-	32	24	2700	93
	4000	2600	-	32	24	3000	93
	4200	2730	-	32	24	4000	93

### Driver da ordinare separatamente / Drivers to be ordered separately

**07250** Output 24Vdc 75W  
On/Off

Controller da ordinare separatamente  
Controller to be ordered separately

**CT00050** Dimmer 1 ch  
DALI2-PUSH-0/1..10V

**CT00052** Dimmer 1 ch  
PUSH/WIRELESS

### Reference configurator

Il codice prodotto si compone mettendo in fila, da sinistra a destra, i dati contenuti nelle colonne a partire da "Codice base".

The product code is created by putting in sequence the data starting from "Base code", from left to right.

es: LS2-OPLC02L20

