



# HYDRA OPTICS OUTDOOR

Esterni Outdoor

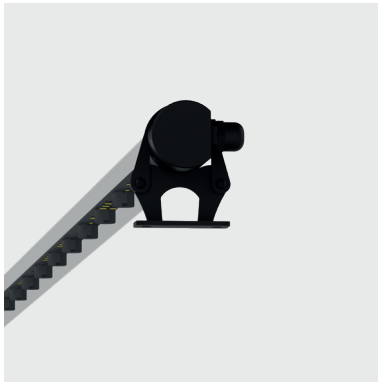

00 Alluminio  
Aluminium

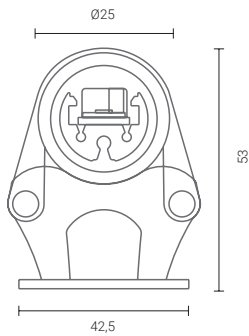

-L06	-L12	-L18
0,606 m	1,206 m	1,806 m
0,75 Kg	1,50 Kg	2,25 Kg

Codice base Base code	Ottica Optic	Fissaggio Fixing	Colour T (K)	Finitura Finish	Chiusura Closing
--------------------------	-----------------	---------------------	-----------------	--------------------	---------------------

Variante da comporre a seconda delle proprie necessità  
Variant to compose according to your needs

<b>HY -</b>	<b>1 15°</b>	<b>PL</b>	<b>Z 2700K</b>	<b>00</b>	<b>L06</b>
	<b>2 25°</b>		<b>C 3000K</b>		<b>L12</b>
	<b>4 40°</b>		<b>N 4000K</b>		<b>L18</b>
	<b>J 18x48°</b>				

24Vdc

CE IP65

## Caratteristiche illuminotecniche / Lighting specifications

Dimensione Size (mm)	LED Lumen	Product Lumen		Watt	Vdc	Colour T	CRI
		opal	prismatic				
606	912	803	-	6	24	2700	83
	978	861	-	6	24	3000	83
	990	871	-	6	24	4000	83
1206	1824	1605	-	12	24	2700	83
	1956	1721	-	12	24	3000	83
	1980	1742	-	12	24	4000	83
1806	2736	2408	-	18	24	2700	83
	2934	2582	-	18	24	3000	83
	2970	2614	-	18	24	4000	83

Driver da ordinare separatamente / Drivers to be ordered separately

**07250** Output 24Vdc 75W  
On/Off

Controller da ordinare separatamente  
Controller to be ordered separately

**CT00050** Dimmer 1 ch  
DALI2-PUSH-0/1..10V

**CT00052** Dimmer 1 ch  
PUSH/WIRELESS

## Reference configurator

Il codice prodotto si compone mettendo in fila, da sinistra a destra, i dati contenuti nelle colonne a partire da "Codice base".

The product code is created by putting in sequence the data starting from "Base code", from left to right.

es: HY-2PLC02L12

